

Shape

KSQ-706BP
KSQ-601BP



Model Number	KSQ-706BP	KSQ-601BP
Rated Voltage (Vo-p)	1.5	
Operating Voltage Range (Vo-p)	1.0 ~ 2.0	
Current Consumption (mA)	Max. 20	Max. 35
Coil Resistance (Ω)	50.0 ± 7.5	16.0 ± 2.4
Sound Pressure Level (dBA)	Min. 70dBA(Typical 75)@10cm	Min. 70dBA(Typical 76)@10cm
Rated Frequency (Hz)	2048	
Operating Temperature ($^{\circ}\text{C}$)	$-20 \sim +60$	
Storage Temperature ($^{\circ}\text{C}$)	$-30 \sim +70$	
Weight (Gram)	2.0	
Material	PPO	


Shape

KSQ-RP/E




Model Number	KSQ-RP/E
Rated Voltage (Vo-p)	1.5
Operating Voltage Range (Vo-p)	1.0 ~ 2.0
Current Consumption (mA)	Max. 80
Coil Resistance (Ω)	5.0 ± 1.0
Sound Pressure Level (dBA)	Min. 85dBA(Typical 91)@10cm
Rated Frequency (Hz)	2730
Operating Temperature ($^{\circ}\text{C}$)	$-20 \sim +60$
Storage Temperature ($^{\circ}\text{C}$)	$-30 \sim +70$
Weight (Gram)	2.0
Material	Noryl SE1-J

Dimension

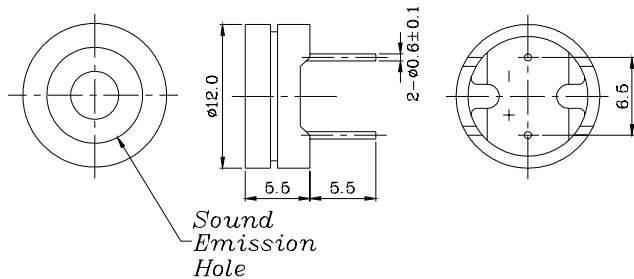

Tol : ± 0.5 Unit : mm

Dimension


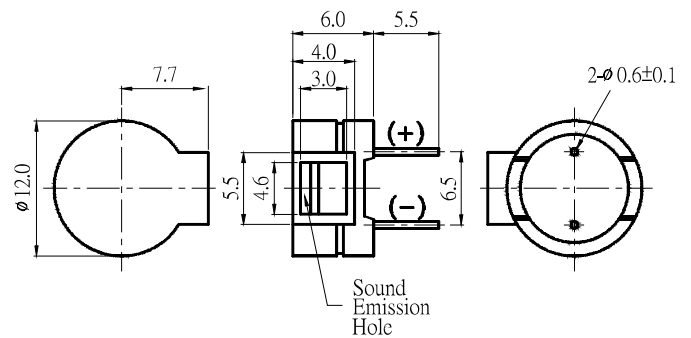


Tol : ± 0.5 Unit : mm

Characteristic

KSQ-706BP

KSQ-601BP



Characteristic

A: Frequency Response, Magn dB re 20.00uPA

