

Temperature sensor (NTC)
NTC sensor assembly / systems



NTCGP, NTCRP, NTCDP series

PRODUCT LINEUP

NTCGP series Resin dipping multilayer element

Resin dipping type



Lug terminal type



NTCRP series Glass-encapsulated radial lead

PPS resin case type / 200°C heat resistance




NTCDP series Glass-encapsulated axial lead

PPS resin molding type oil temperature sensor with bracket



PPS resin molding type oil temperature sensor with O-ring

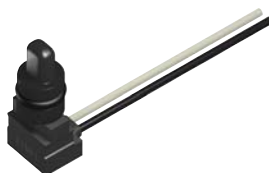

NTCDP series Glass-encapsulated axial lead / for home appliances and industrial machinery

Epoxy resin case type



Epoxy resin case fasten screw type



ABS resin case type



Temperature sensor (NTC)

NTC sensor assembly / systems

NTCGP, NTCRP, NTCDP series

PART NUMBER CONSTRUCTION

NTC	○	P	□□	○	□□□	○	○	○	○	○	○	□□□
Series name	Structural classification	Assembly product	B constant (K)	B constant tolerance (%)	Nominal resistance (W)	Resistance tolerance (%)	Standard temperature (°C)	Envelope structural	Dimension of length	Insulation material of lead wire	Wire tip processing	Internal code
NTC sensor				F ±1 G ±2 H ±3 J ±5 K ±10 X Others	2 significant digits + power of 10	F ±1 G ±2 H ±3 J ±5 K ±10 X Others	A -20 B 0 C 25 D 100					
Structural classification			Envelope structural									
G	Multilayer element NTC thermistor		A ABS resin case type ø8.0mm									
D	Glass-encapsulated axial lead NTC thermistor		B ABS resin case type ø6.8mm									
R	Glass-encapsulated radial lead NTC thermistor		C ABS resin case type ø6.0mm									
			D Epoxy resin case type ø5.5mm									
			E Epoxy resin case type ø6.0mm									
			F Epoxy resin case fasten screw type									
			G PPS resin case type									
			H PPS resin molding type / oil temperature sensor									
			J Resin dipping type									
			N Composite type									
			Z Lug terminal type									
			X Others									

Temperature sensor (NTC)

NTC sensor assembly / systems

NTCGP series(Resin dipping multilayer element)

Resin dipping type

FEATURES

- Adopts a multilayer element type NTC thermistor.
- Fast heat responsiveness due to its small size.
- Lead-free product.

APPLICATION

- Room temperature detection (air conditioners, fan heaters etc.)
- Temperature control (surface of toilet seats with warm water washing feature, etc.)
- Water temperature detection (hot water pots etc.)
- Temperature detection (refrigerator compartments, heated carpets etc.)



SPECIFICATIONS


Thermistor	Resin dipping multilayer element type
Wires	AWG26 (Sn-plated 0.16mmx7) parallel cable with vinyl chloride sheath (heat proof 105°C)
Wire tip	Wire strips, crimp terminals, and connectors are available.
Operating temperature range	-40 to +105°C
Heating time constant	6s max. (in still oil)
Heat dissipation constant	2.8mW/°C (in still air)

CHARACTERISTICS SPECIFICATION

Part No.	B constant	Resistance R25	Overall length dimensions	Wire tip
NTCGP3JH103HCJBAA	B25/85 : 3435K±3%	R25 : 10kΩ ±3%	300±10mm	Strip wire
NTCGP3UH153HCJBAA	B25/50 : 3950K±3%	R25 : 15kΩ ±3%	300±10mm	Strip wire
NTCGP3UH503HCJBAA	B25/50 : 3950K±3%	R25 : 50kΩ ±3%	300±10mm	Strip wire

- Contact us for other nominal resistance values and B constants.
- Contact us for other overall length dimensions and tolerances. (Full length range: 150 to 1000 mm)
- Contact us for other tip processing.

SHAPE & DIMENSIONS

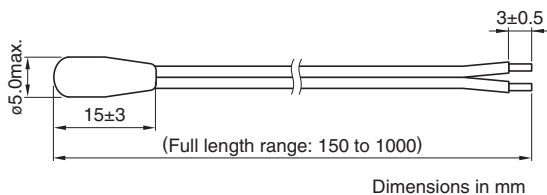

Temperature sensor (NTC)

NTC sensor assembly / systems

NTCGP series(Resin dipping multilayer element)**Lug terminal type****FEATURES**

- Possible to affix using a fasten screw and to perform stable temperature detection of the mounting surface.
- Can be used for a wide temperature range (−40°C to +125°C).
- Can be installed in vehicles.

APPLICATION

- Temperature detection (inverters for solar power generation and projectors)
- Substrate temperature detection (converters for HEVs and EVs)


**SPECIFICATIONS**

Thermistor	Resin dipping multilayer element type
Wires	AWG26 (Sn-plated 0.16mmx7) parallel cable with polyethylene (heat proof 125°C)
Wire tip	Wire strips, crimp terminals, and connectors are available.
Operating temperature range	−40 to +125°C
Heating time constant	6s max. (in still oil)
Heat dissipation constant	3mW/°C (in still air)

CHARACTERISTICS SPECIFICATION

Part No.	B constant	Resistance R25	Overall length dimensions	Wire tip
NTCGP3JH103HCZCCA	B25/85 : 3435K±3%	R25 : 10kΩ ±3%	400±10mm	Strip wire
NTCGP3UH153HCZCCA	B25/50 : 3950K±3%	R25 : 15kΩ ±3%	400±10mm	Strip wire
NTCGP3UH503HCZCCA	B25/50 : 3950K±3%	R25 : 50kΩ ±3%	400±10mm	Strip wire

- Contact us for other nominal resistance values and B constants.
- Contact us for other wire length dimensions and tolerances. (Corresponding wire length range: 150 to 1000 mm)
- Contact us for other tip processing.

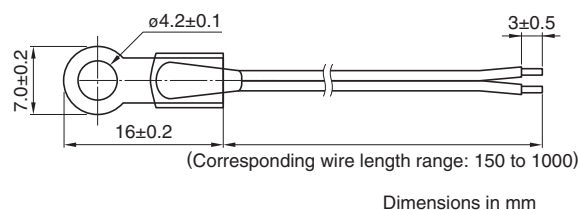SHAPE & DIMENSIONS

Temperature sensor (NTC)

NTC sensor assembly / systems

NTCRP series(Glass-encapsulated radial lead)**PPS resin case type / 200°C heat resistance****FEATURES**

- Excellent ATF resistance.
- Operating temperature range: -40°C to $+200^{\circ}\text{C}$
- Fast heat responsiveness due to its small size.

APPLICATION

Coil temperature detection for EV, HEV and PHEV drive motor

Inner temperature detection for the servomotor used for various industries


**SPECIFICATIONS**

Thermistor	Glass-encapsulated radial lead
Wires	Fluorinated wire
Wire tip	Wire strips, crimp terminals, and connectors are available.
Operating temperature range	-40 to $+200^{\circ}\text{C}$
Heating time constant	10s max. (in still oil)
Heat dissipation constant	1.9mW/ $^{\circ}\text{C}$ (in still air)

CHARACTERISTICS SPECIFICATION

Part No.	B constant	Resistance	Wire length dimension	Wire tip
NTCRP3VG332JDGBEA	B0/100 : $3970\text{K} \pm 2\%$	R100 : $3.3\text{k}\Omega \pm 5\%$	$300 \pm 10\text{mm}$	Strip wire

- Contact us for other nominal resistance values and B constants.
- Contact us for other wire length dimensions and tolerances. (Corresponding wire length range: 150 to 300 mm)
- Contact us for other tip processing.

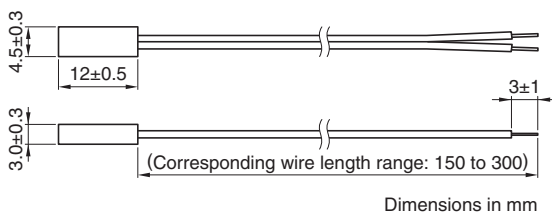SHAPE & DIMENSIONS

Temperature sensor (NTC)

NTC sensor assembly / systems

NTCDP series(Glass-encapsulated axial lead)**PPS resin molding type oil temperature sensor with brackets****FEATURES**

- High heat resistance.
- Excellent oil resistance and ATF resistance.

APPLICATION

Oil temperature detection for ATF, transmission oil, oil heaters, etc.


**SPECIFICATIONS**

Thermistor	Glass-encapsulated axial lead
Wires	Fluorinated wire
Wire tip	Wire strips, crimp terminals, and connectors are available.
Operating temperature range	-40 to +150°C
Heating time constant	30s max. (in still oil)
Heat dissipation constant	5mW/°C (in still air)

CHARACTERISTICS SPECIFICATION

Part No.	B constant	Resistance	Wire length dimension	Wire tip
NTCDP3LG720JXHCEA	B20/80 : 3520K±2%	R140 : 0.072kΩ ±5%	445±10mm	Strip wire

- Contact us for other nominal resistance values and B constants.
- Contact us for other wire length dimensions and tolerances. (Corresponding wire length range: 150 to 500 mm)
- Contact us for other tip processing.
- Consult with you when you request a change in the dimensions of the bracket to which the sensor is fixed.

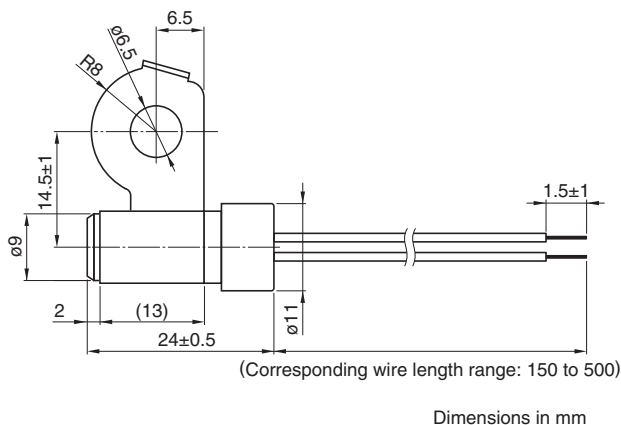SHAPE & DIMENSIONS

Temperature sensor (NTC)


NTC sensor assembly / systems

NTCDP series(Glass-encapsulated axial lead)**PPS resin molding type oil temperature sensor with O-ring****FEATURES**

- High heat resistance.
- Excellent oil resistance and ATF resistance.
- Detection portion is sealed by an O-ring allowing for direct detection of oil temperature.

APPLICATION

Oil temperature detection for ATF, transmission oil, oil heaters, etc.

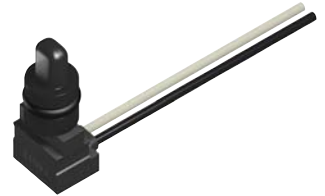
**SPECIFICATIONS**

Thermistor	Glass-encapsulated axial lead
Wires	Fluorinated wire
Wire tip	Wire strips, crimp terminals, and connectors are available.
Operating temperature range	-40 to +150°C
Heating time constant	15s max. (in still oil)
Heat dissipation constant	3.5mW/°C (in still air)

CHARACTERISTICS SPECIFICATION

Part No.	B constant	Resistance	Wire length dimension	Wire tip
NTCDP3LG111XXHBEA	B25/85 : 3528K±2%	R145 : 0.111kΩ ±2.5%	210±10mm	Strip wire

- Contact us for other nominal resistance values and B constants.
- Contact us for other wire length dimensions and tolerances. (Corresponding wire length range: 150 to 300 mm)
- Contact us for other tip processing.

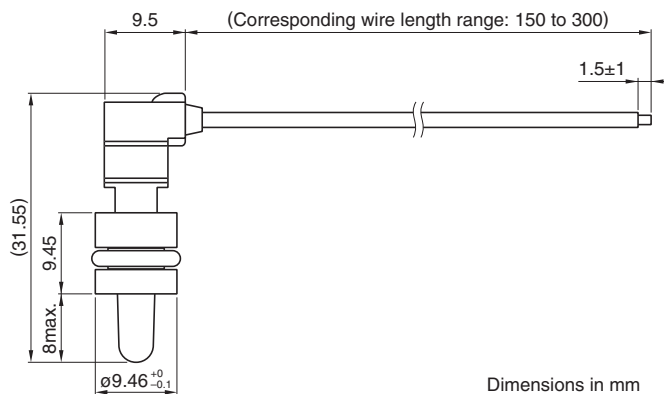SHAPE & DIMENSIONS

Temperature sensor (NTC)

NTC sensor assembly / systems

NTCDP series(Glass-encapsulated axial lead)

Resin case type for home appliances and industrial machinery

FEATURES

- Excellent in high responsiveness, high heat resistance.
- High reliability with glass-sealed axial lead thermistors.

APPLICATION

Temperature detection of refrigerator and vending machine compartments(air conditioners, refrigerators, vending machines, dishwashers, etc.)

SPECIFICATIONS

	Thermistor	Wires	Wire tip	Operating temperature range	Heating time constant	Heat dissipation constant
Epoxy resin case type	Glass-encapsulated axial lead	Cross-link vinyl chloride (Heat resistance 105°C)	Strip wire(*1)	-40 to 105°C (*2)	15s max. (in still oil)	3.3mW/°C (in still air)
Epoxy resin case fasten screw type						
ABS resin case type	Glass-encapsulated axial lead	Vinyl chloride (Heat resistance 105°C)	Strip wire(*1)	-40 to 85°C	30s max. (in still oil)	2.5mW/°C (in still air)

(*1) Compatible with crimp terminal and connector.

(*2) Up to 150°C can be supported by changing the wire material.


CHARACTERISTICS SPECIFICATION

	Part No.	B constant B25/85	Resistance R20	Wire length dimension	Wire tip
Epoxy resin case type (ø5.5)	NTCDP4AG103JCDBBA	B25/85 : 4000K±2%	R25 : 10kΩ±5%	300±10mm	Strip wire
Epoxy resin case fasten screw type	NTCDP4AG103HCFCBA	B25/85 : 4000K±2%	R25 : 10kΩ±3%	400±10mm	Strip wire
ABS resin case type (ø6.8)	NTCDP3SG562HXBBAA	B3/50 : 3850K±2%	R3 : 5.6kΩ±3%	300±10mm	Strip wire


- Contact us for other nominal resistance values and B constants.
- Contact us for other wire length dimensions and tolerances. (Corresponding wire length range: 150 to 1500 mm (Epoxy resin case fasten screw type is 150 to 1000 mm))
- Contact us for other tip processing.

SHAPE & DIMENSIONS


Epoxy resin case type

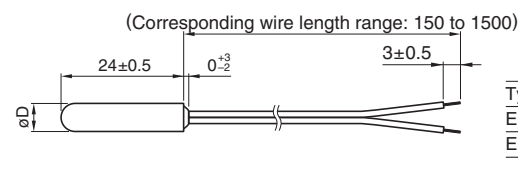

Epoxy resin case fasten screw type

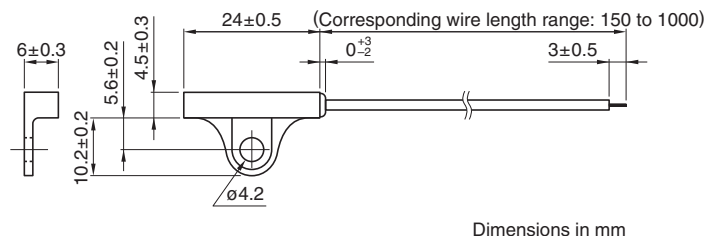

ABS resin case type

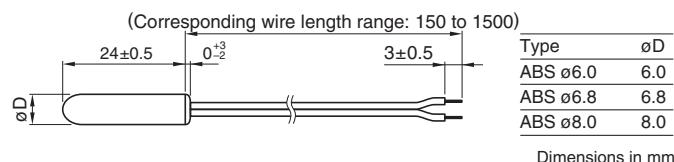

REMINDER FOR USING

Be sure to request specification sheet before using.

SAFETY WARNING

Pay careful attention to all warnings and operate only in accordance with safety specifications.
Incorrect usage may lead to destroyed NTC thermistors and damages or malfunctions with the devices used.

CAUTION

- Ensure to use thermistors under proper operating and mounting condition and only as specified in a product catalogue or final specification.
- This thermistor is designed for the intended purpose. Do not use for any other purposes.
- Use thermistors only within the specified operating temperature range.
- Use thermistors only within the specified power range.
- The specified dissipation factor of the thermistor must not be exceeded. Exceeding this limit may cause fire through temperature increase with the resistance change of the NTC thermistor.
- Alert consumers that the thermistor in the application must not be touched by bare hands directly.
- The thermistor should be stored in original packaging under the following environment : Temperature: -10°C to $+40^{\circ}\text{C}$
Relative humidity: less than 75%
Avoid rapid temperature change, direct sunshine, corrosive gas, dust, mechanical stress or pressure.
- During design process, be sure to test the application reliability after the thermistor assembly to confirm there is no abnormality.
- Be sure to design safety circuit or prepare same functional sensor to prevent accident when the thermistor is used as sensor.
- Avoid to apply vibration, mechanical shock (drop), or pressure more than specified.
- Avoid to repeat bending the thermistor more than specified.
- Avoid to apply force more than specified.
- Avoid to bend strongly or make external force for outlet of the thermistor of the product is with terminal.
- Fix thermistor head side to bend or cut the lead wire.
- Contacts on lead wire surface should be clean without any stain and rust to avoid contact failure.
- Prepare following countermeasure to prevent the influence of noise.
 - Protection circuit
 - Shield of thermistor (include lead wire).
- Pay attention following items to install the thermistor to prevent malfunction caused by incorrect measurement of thermistor.
 - Prevent the influence of heating element or cooling device so that the thermistor element part
 - When detecting object surface, fix between thermistor and the object by high conductive
- Please take consideration an appropriate fail-safe function in customer application which requires a very high level of operational safety and reliability or could endanger society or human life. Please contact us before using the NTC thermistor assembled for the following application if those malfunction of failure might have serious damage to human life, health or one's property and severe influence on society. Application : cars, aerospace/aviation equipment, medical equipment, nuclear power plant equipment