


9-4. Control Microcomputer, Karaoke and Mic Amp. Section

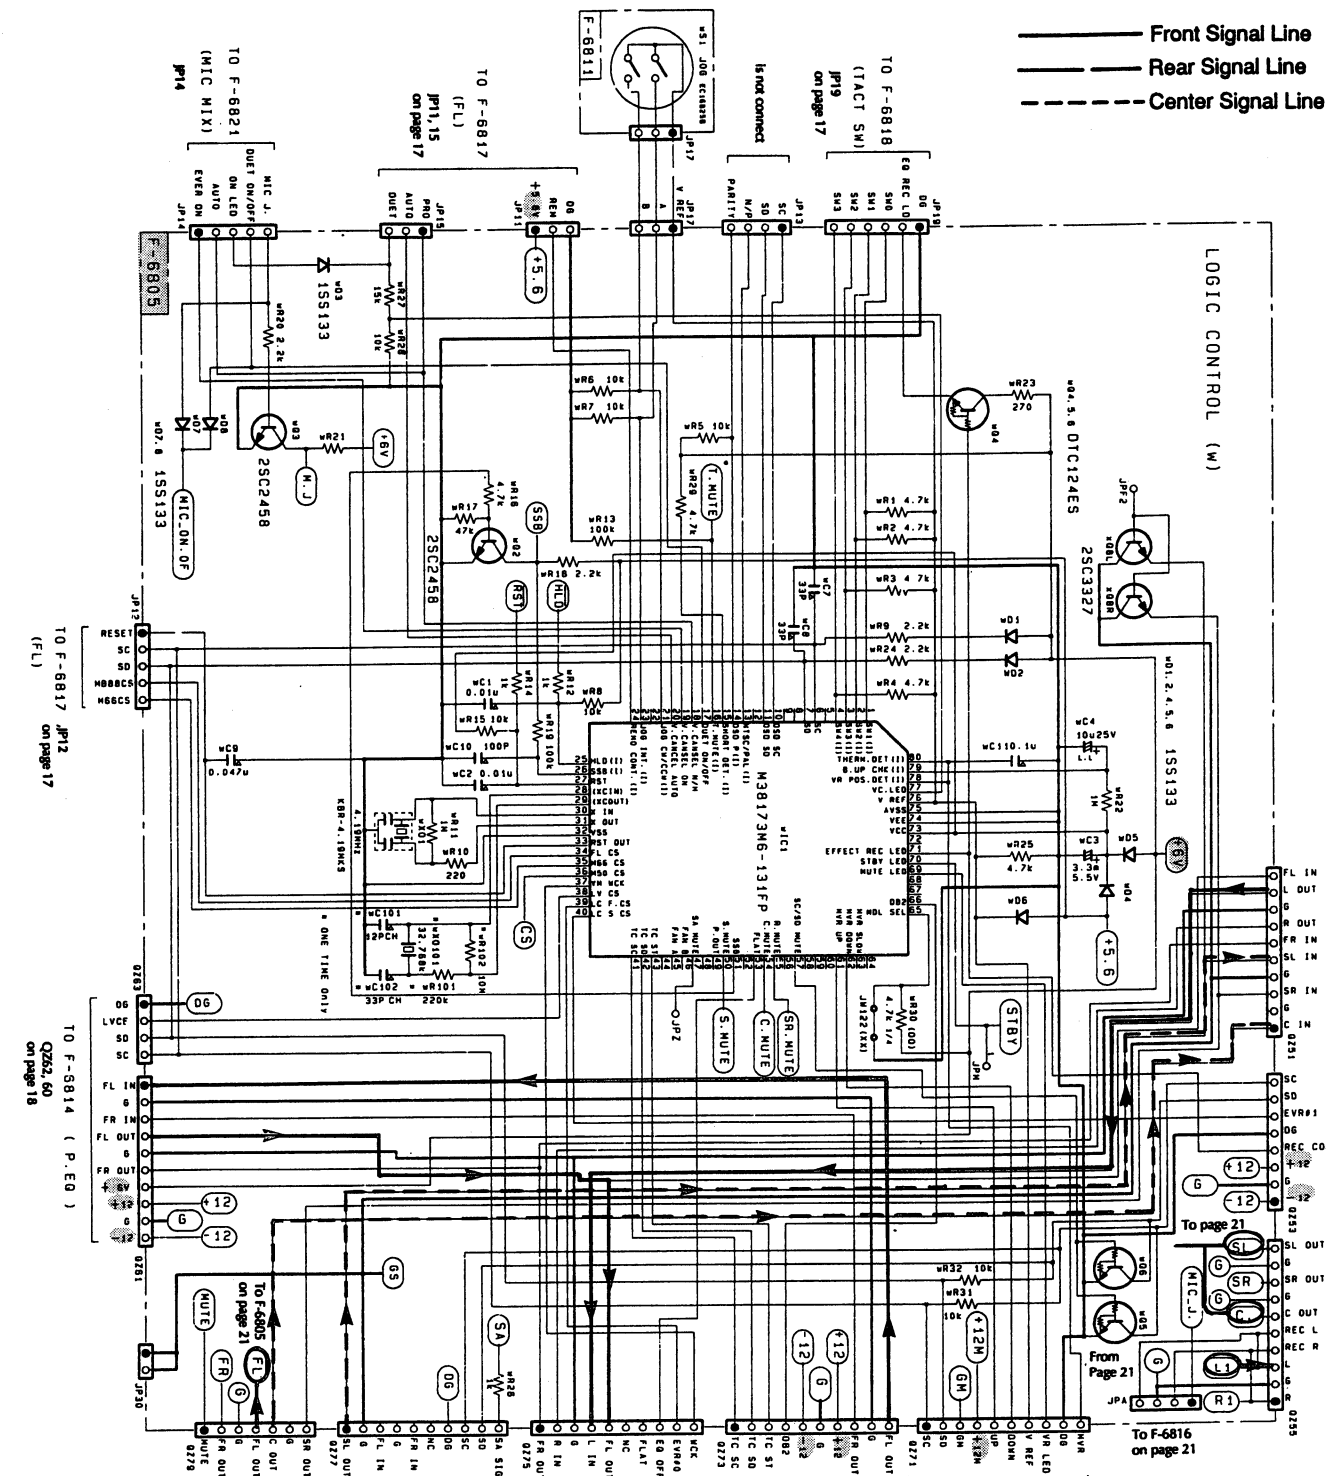

TO F-6812
(SURROUND)
QZ78, 76, 74, 72, 70
on page 19

SYMBOL

△ Ceramic
Δ Barrier Layer Capacitor
B.P Bi-Polar Electrolytic
○ Mylar

RESISTORS

Are in ohms .1/6 Watts $\pm$ 5% Tolerance
Unless Otherwise Noted k:kilo Ohms


CAPACITORS

Are in uF. Unless Otherwise NOTED
p: pF

Electrolytic Capacitor

Capacitance (uF) / Voltage (V)

Each D.C. Voltage shows the nominal value in volts at no input signal.

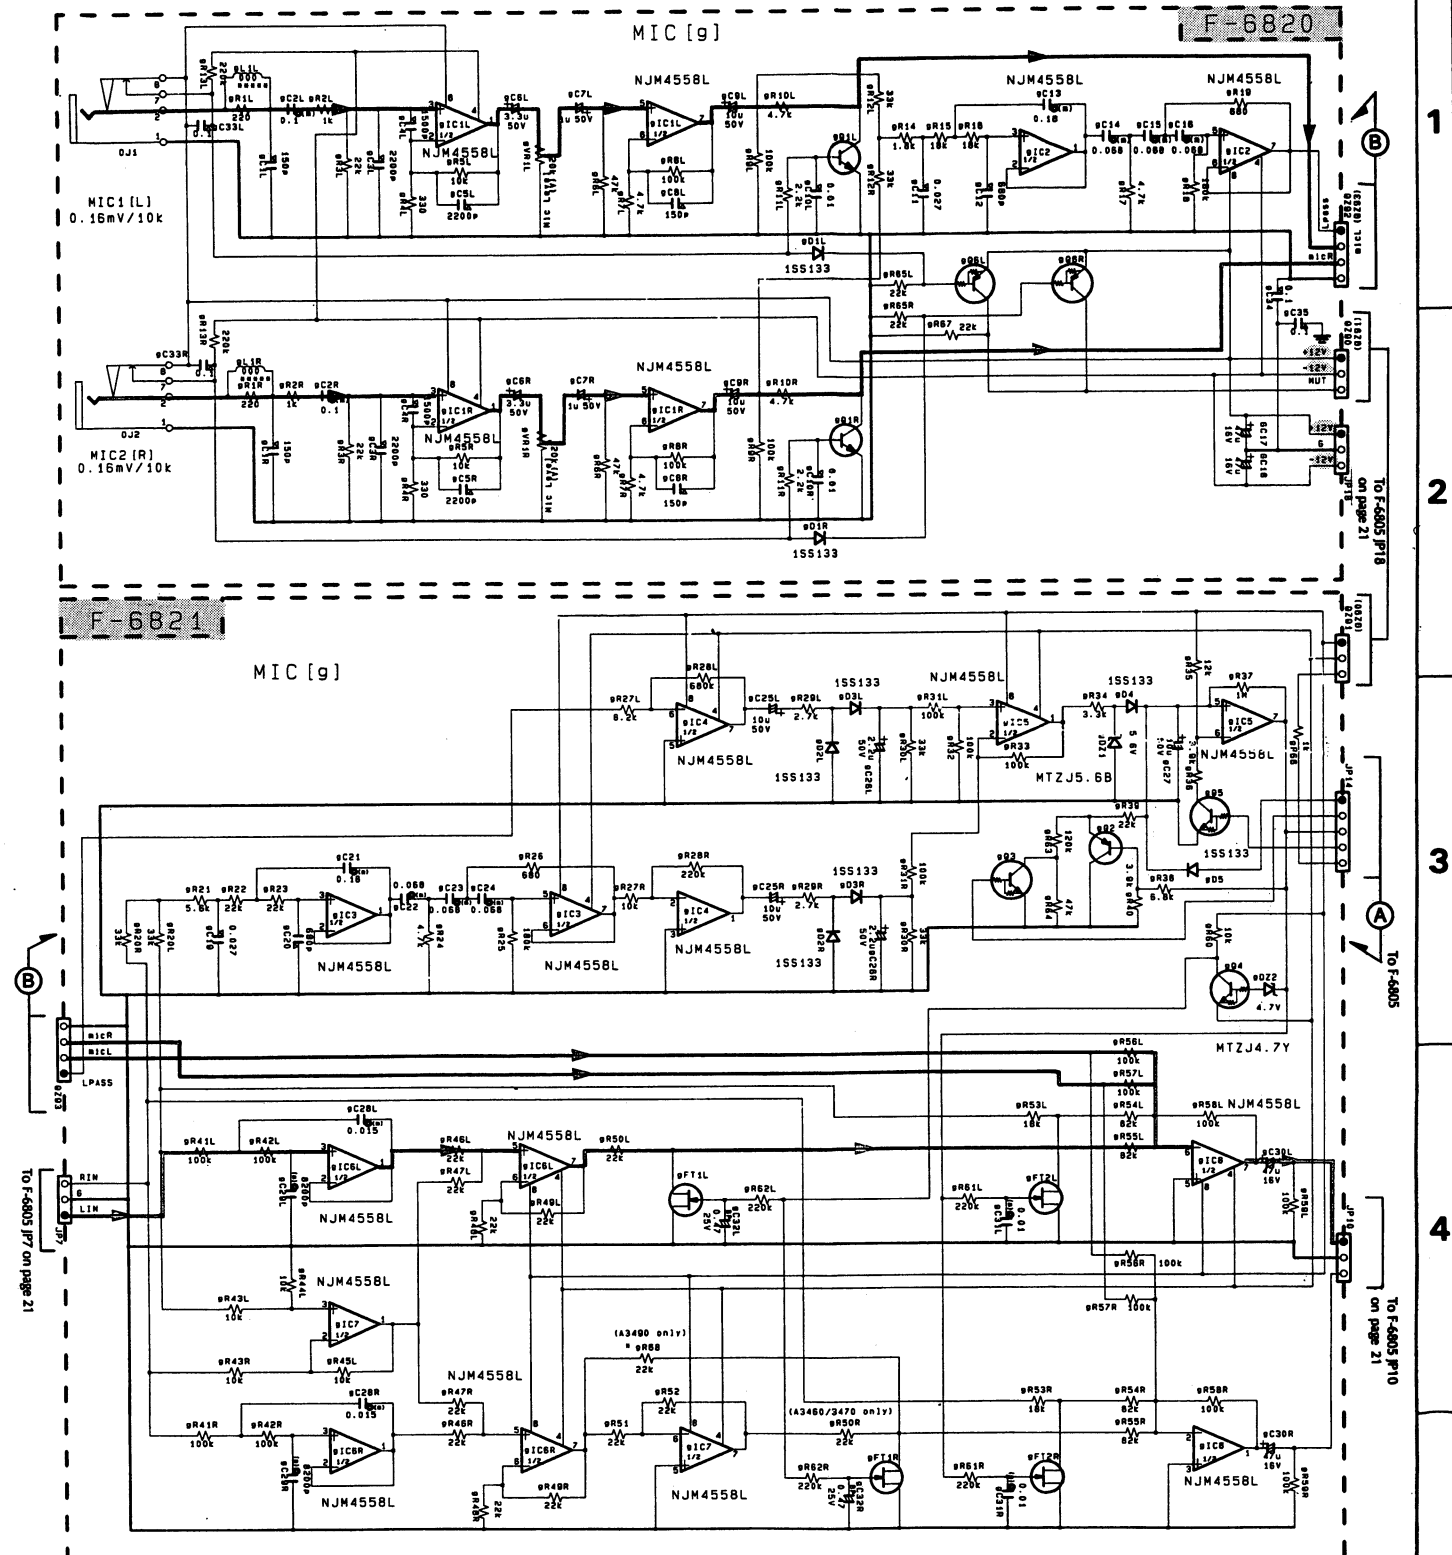

gIC1-B NJM4558L, M5218AL
gQ1 2SC2603 (E, F), 2SC1740S (R, S)
gQ2 2SA1115 (E, F), 2SA933S (R, S)
gQ3-5 DTC114ES, RN1202
gQ6 DTA124ES, RN2203
gFT1, 2 2SK163 (K2, K1, L1, L2, M1, M2, N1, N2)
2SK246 (Y, GR, BL)

SYMBOL OF FUNCTION

(j)	CONTROL
(k)	POWER AMP
(l)	PROTECTOR
(m)	POWER SUPPLY
(o)	SELECTOR
(p)	FIXED PARTS
(g)	MIC

SYMBOL

Δ	Ceramic
$\square$	Barrier Layer Capacitor
S.P	Bi-Polar Electrolytic
$\otimes$	Klyar
$\square$	Non-Inflammable Resistor
$\square$	Cement Resistor
$\square$	Fusing Resistor

 is Safety part.
Use only replacement parts
recommended by manufacturer.